

FICHA TÉCNICA

LED
Reflector
SOLUM 300W

AHORA **150 LÚMENES** POR WATT

Son ideales para diferentes aplicaciones a la intemperie donde hay humedad, lluvia y polvo.

Proporcionan una iluminación uniforme en zonas amplias como jardines, calles y parques.




DISEÑO, POTENCIA Y ALTA RESISTENCIA




Montaje Universal para:

Techo, Pared ó Piso. Ideal para usarse en Letreros, Espectaculares, Gasolineras, Fachadas, Jardines, Bodegas, Casetas de Cobro, etc.

Dimensiones:

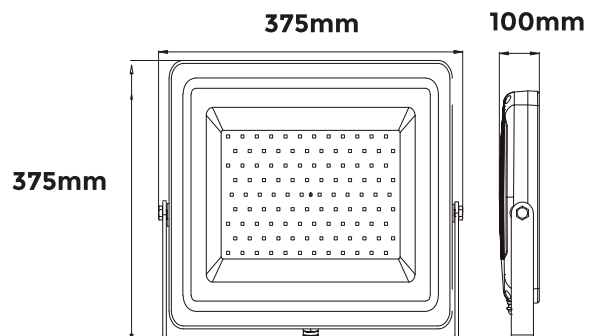

REFLECTOR SOLUM 300W

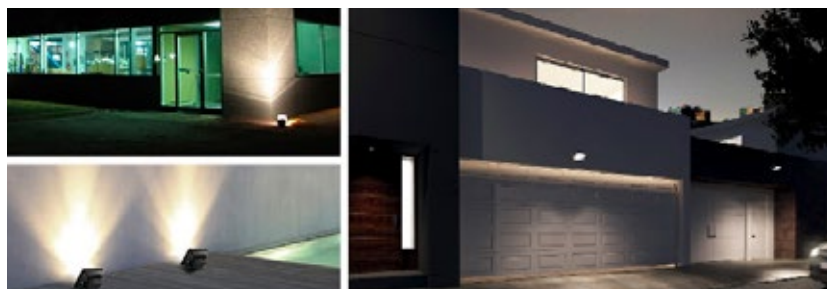

MODELO DE ALTA RESISTENCIA, CUENTA CON UN DISEÑO VANGUARDISTA Y REFLEJA LUZ BRILLANTE SIN PERDER CLARIDAD.

80%
AHORRO
DE ENERGÍA

300W
WATT


AC 85 – 265V
50/60Hz


45 000 lm


6500K

CRI
≥ 90


50,000 H


Hg
0.0mg
LIBRE DE MERCURIO

CLAVES DEL PRODUCTO:

DESCRIPCIÓN

REFLECTOR SOLUM150 300W - 85-265V - 6500K LUZ DÍA - IP66



La información contenida en esta ficha técnica es propiedad de Novalamps Peru S.A.C. Todos los derechos reservados. Nos reservamos el derecho de hacer modificaciones sin previo aviso.



PRODUCTS SPECIFICATION

P. No.: SOLUM-300W

Manufacturer Name:	NOVA CENTER PERU SAC
Manufacturer address:	av guillermo dansey 331 of213 lima cercado, LIMA. PERU
Product name/Describe:	LED FLOOD LIGHT 300W 6500K/ AC85-265V~, 50/60Hz/, IP66
Model No.:	SOLUM-300W
Trademark:	
CE –LVD Certificate No.:	LCSB020123067S
CE –LVD Certificate Test standard:	EN 60598-2-5:2015; EN IEC 60598-1:2021; EN 62493:2015; EN IEC 62031:2020
CE –EMC Certificate No.:	LCSB020123070E
CE –EMC Certificate Test standard:	EN IEC 55015:2019+A11:2020 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013+A1:2019+A2:2021 EN 61547:2009
Certificate :	 



● **Product picture:**



SOLUM-300W

● **Datasheet :**

Type	Brand:	novaLamps En iluminación lo tenemos todo
	Product Name:	LED FLOOD LIGHT
	Model No.:	SOLUM-300W 6500K
	Waterproof grade:	IP66
Electronical info (Driver info)	LED Drive model No.:	HXS100W-100SOA×3PCS
	Input Voltage(V):	AC85-265V~, 50/60Hz
	Output Voltage(V)	DC65-84V
	Power supply operating temperature(°C):	Tc 75°C/Ta 50°C
	Led Drive Type:	IP65 Waterproof / Isolated drive power supply
	Current (m A):	1.40A
	Power (W):	300W (±3%)
	Power Factor (PF):	PF≥0.98
Optical (LED lamp beads (chips) & Technical parameter testing)	Certificates:	CE-LVD/CE-EMC
	LED Chips Brand:	EPISTAR-No.;,200-210lm/W.6v- EL3030-4chips
	LED Chips quantity (PCS)	34B13C/ 442 PCS /SMD3030/4chips(Customized)
	LED Chips VF(V):	6.0 -6.5V
	LED Chips IF (m A);	≥ 150mA
	Beam Angle:	110°
	Color Temperature(CCT):	6500K(±5%)
	Color Render Index(CRI):	CRI ≥85 (±3%)
	IES Test Luminous Efficiency (lm/W):	≥150lm/W
Lamp Structure	IES Test Total Lumens:	≥45000 lm
	Housing Material:	Die Casting –Aluminum
Others	Model Diameter (mm):	L375mm×W375mm ×H100mm
	Installation Type:	Stationary type
	Ambient Temperature:	-25℃～105℃
	Storage Temperature:	-30℃～125℃
	Housing Temperature(working):	<60-75℃ (Ta=50℃)
	Lifetime(H)	50,000H
	Warranty:	≥ 2 years

