

FICHA TÉCNICA

LED
Reflector
SOLUM 500W

AHORA **150 LÚMENES** POR WATT

Son ideales para diferentes aplicaciones a la intemperie donde hay humedad, lluvia y polvo.

Proporcionan una iluminación uniforme en zonas amplias como jardines, calles y parques.




DISEÑO, POTENCIA Y ALTA RESISTENCIA




Montaje Universal para:

Techo, Pared ó Piso. Ideal para usarse en Letreros, Espectaculares, Gasolineras, Fachadas, Jardines, Bodegas, Casetas de Cobro, etc.

Dimensiones:

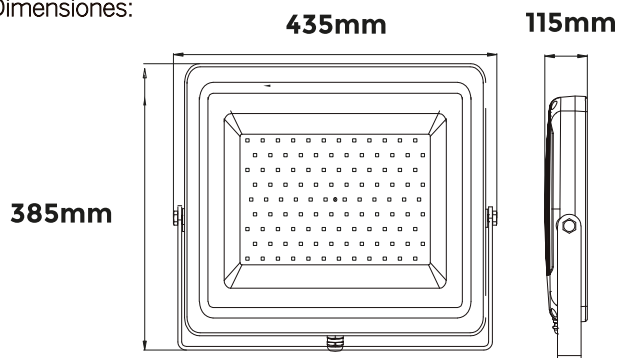

MODELO DE ALTA RESISTENCIA, CUENTA CON UN DISEÑO VANGUARDISTA Y REFLEJA LUZ BRILLANTE SIN PERDER CLARIDAD.

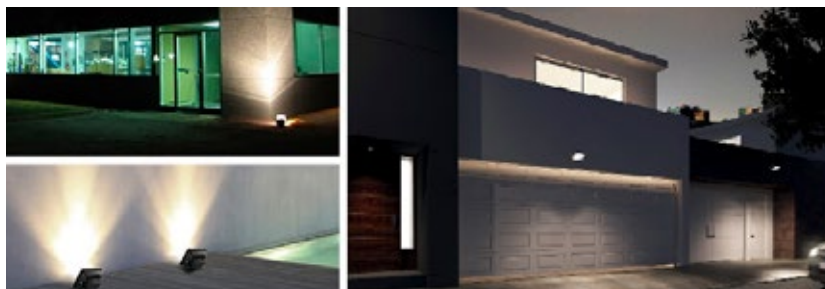

80%
AHORRO
DE ENERGÍA

500W
WATT


AC 85 - 265V
50/60Hz


75 000 lm


6500K

CRI
≥ 90


50,000 H


LIBRE DE MERCURIO

DESCRIPCIÓN

REFLECTOR SOLUM130 500W - 85-265V - 6500K LUZ DÍA - IP66



La información contenida en esta ficha técnica es propiedad de Novalamps Peru S.A.C. Todos los derechos reservados. Nos reservamos el derecho de hacer modificaciones sin previo aviso.

Report No.: TH-3995A

Test Time: 2023/1/2 16:53

Luminaire Property

Luminaire Manufacturer: NOVAELEC SAC.

Luminaire Category:

Lamp Catalog:

Number of Lamps:

Luminous Length (mm):

Luminous Height (mm):

Current: 2.332 A

Power Factor: 0.983

Luminaire Description: SOLUM-500W

Lamp Description:

Lumens per Lamp:

Luminous Width (mm):

Voltage: 221.2 V

Power: 504.60 W

Photometric Results

CIE Class: Direct

Measurement Flux: 71907 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H107.4

Vertical Diffuse Angle(50%): V102.2

Luminaire Efficacy Rating (LER): 142.55

Max. Intensity: 28901.76 cd

S/MH(C0/C180): 1.27

Total Rated Lamp Lumens: 71907.0 lm

Efficiency: 100%


Upward Ratio: 1%

C0r0 Intensity: 28866.88 cd


Pos of Max. Intensity: H90 V2

S/MH(C90/C270): 1.29

Picture Of Luminaire



Luminous Intensity Distribution Curve

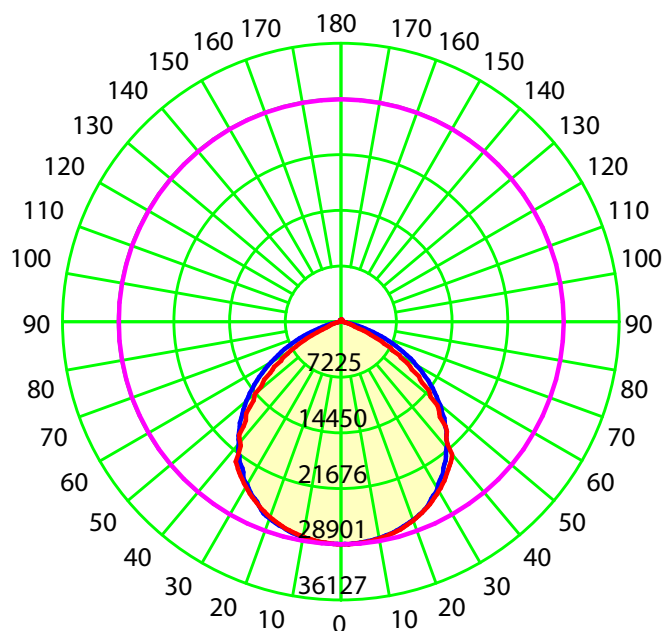

Unit: cd

Average Diffuse Angle(50%): 104.8°

— C0-C180

— C90-C270

— G2

C Plane (°):0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Luminous Intensity Distribution Curve

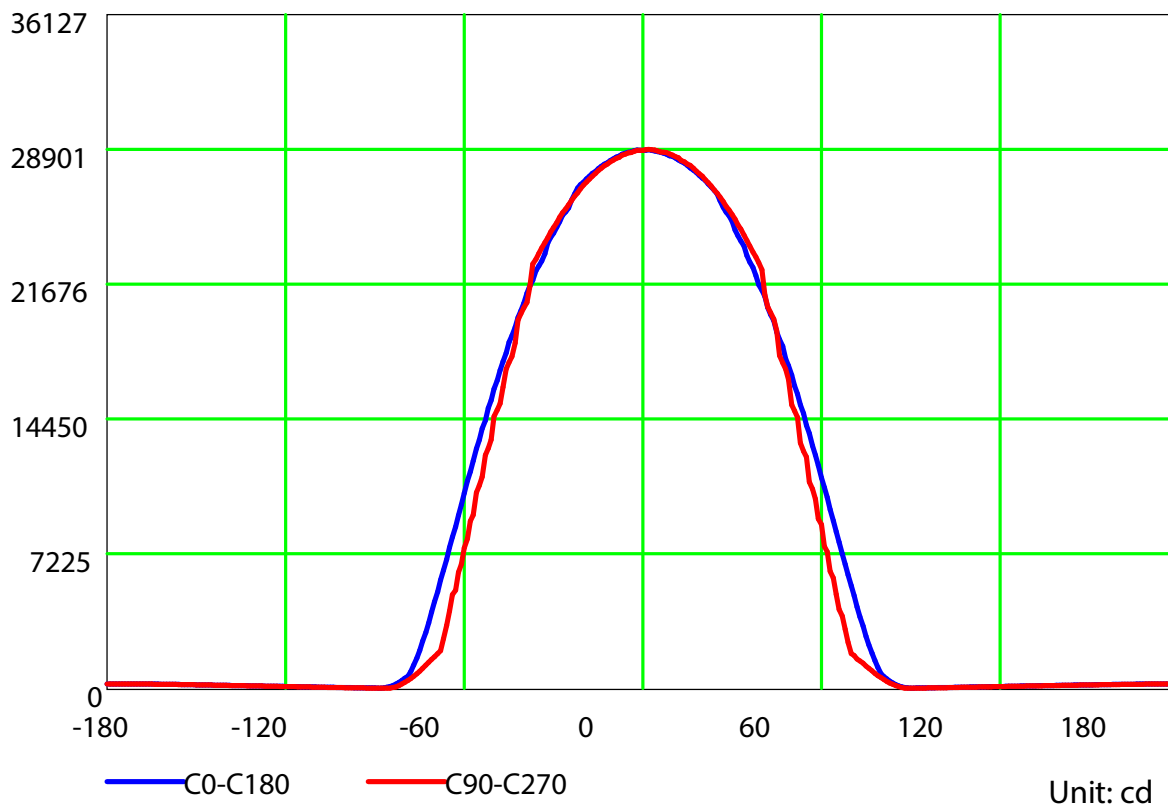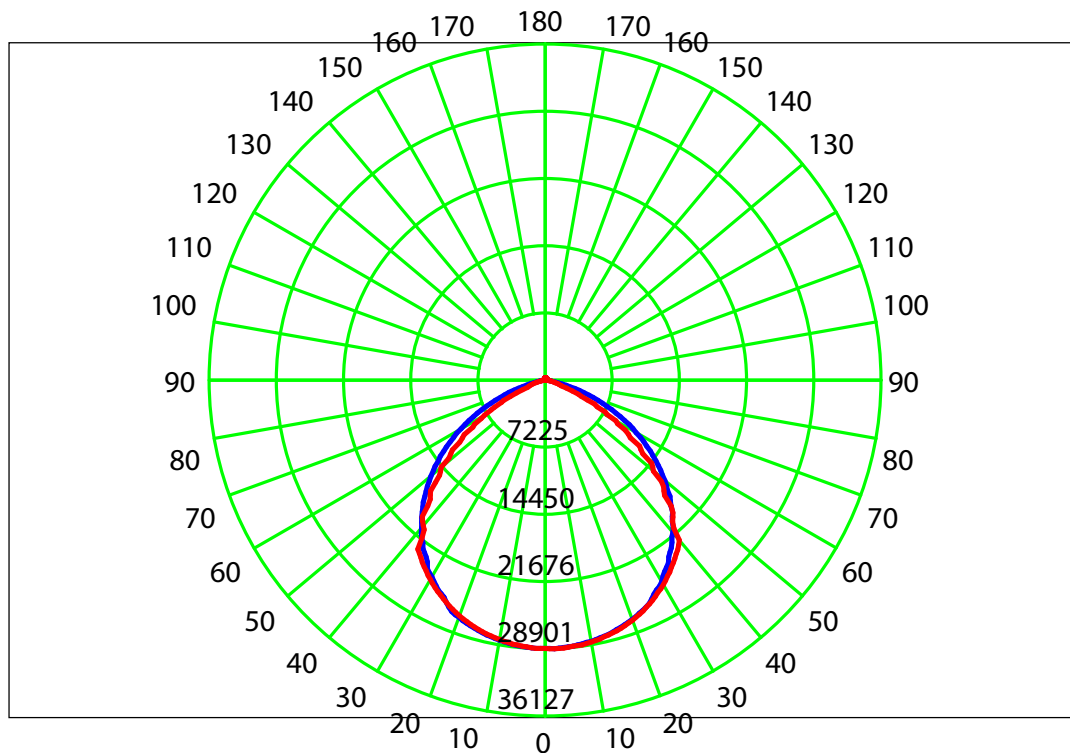

C Plane (°):0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:


Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0			
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0			
RCR	RF = 0.2																				
0	1.191	1.191	1.191	1.191	1.161	1.161	1.161	1.161	1.111	1.111	1.111	1.061	1.061	1.061	1.011	1.011	1.011	0.99			
1	1.101	1.061	1.030	0.991	1.071	1.041	1.010	0.980	0.990	0.970	0.940	0.950	0.930	0.910	0.920	0.900	0.880	0.86			
2	1.010	0.940	0.880	0.830	0.990	0.920	0.870	0.820	0.880	0.840	0.800	0.850	0.810	0.780	0.820	0.790	0.760	0.74			
3	0.930	0.840	0.760	0.700	0.910	0.820	0.750	0.700	0.790	0.730	0.680	0.760	0.710	0.670	0.730	0.690	0.660	0.64			
4	0.860	0.750	0.670	0.600	0.830	0.730	0.660	0.600	0.710	0.640	0.590	0.680	0.630	0.580	0.660	0.610	0.570	0.55			
5	0.790	0.670	0.590	0.520	0.770	0.660	0.580	0.520	0.640	0.570	0.510	0.620	0.560	0.510	0.600	0.540	0.500	0.48			
6	0.730	0.610	0.520	0.460	0.710	0.600	0.520	0.460	0.580	0.510	0.450	0.560	0.500	0.450	0.540	0.490	0.440	0.42			
7	0.680	0.550	0.470	0.410	0.660	0.540	0.460	0.410	0.530	0.450	0.400	0.510	0.450	0.400	0.500	0.440	0.400	0.38			
8	0.630	0.500	0.420	0.370	0.620	0.500	0.420	0.360	0.480	0.410	0.360	0.470	0.410	0.360	0.460	0.400	0.360	0.34			
9	0.590	0.460	0.380	0.330	0.580	0.460	0.380	0.330	0.440	0.370	0.330	0.430	0.370	0.320	0.420	0.360	0.320	0.30			
10	0.550	0.430	0.350	0.300	0.540	0.420	0.350	0.300	0.410	0.340	0.300	0.400	0.340	0.300	0.390	0.330	0.290	0.28			

Spacing Criteria (0-180): 1.27

Spacing Criteria (90-270): 1.29

Spacing Criteria (Diagonal): 1.36

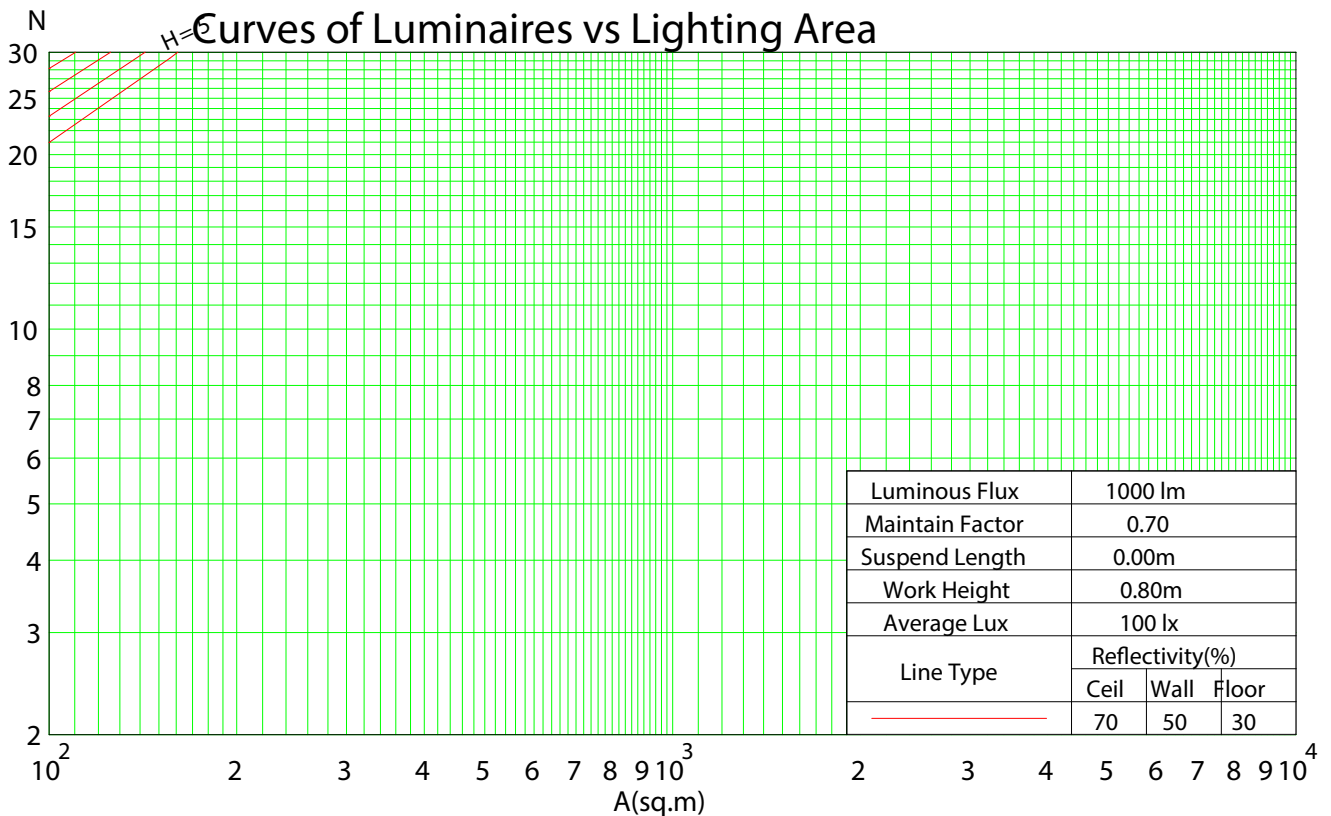

C Plane (°): 0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0


Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Isocandela (rectangle)

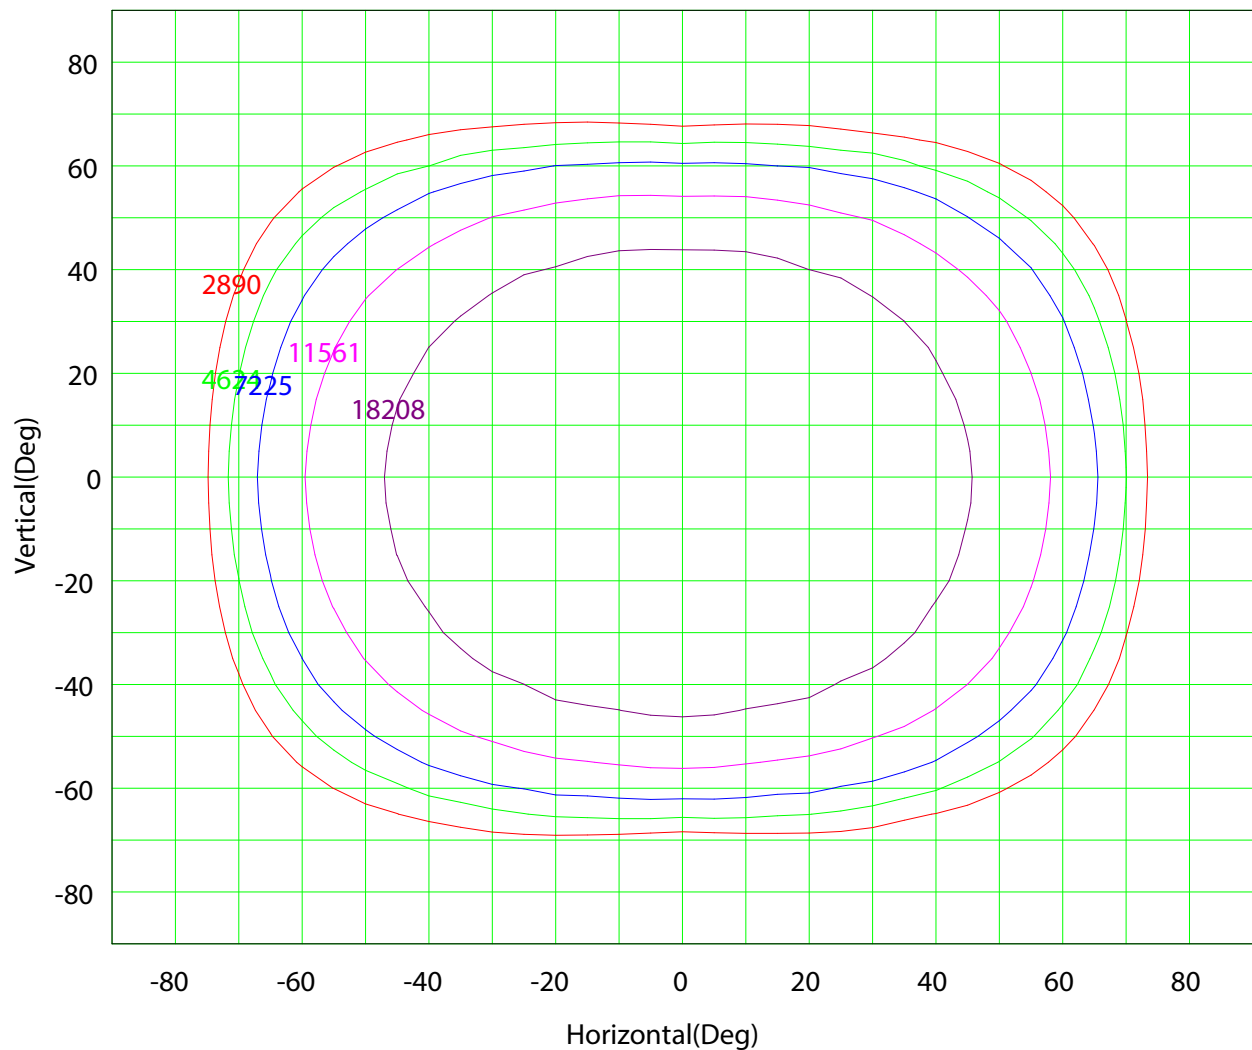

Imax (100%): 28902 cd


(10%): 2890 cd
 (25%): 7225 cd
 (63%): 18208 cd

(16%): 4624 cd
 (40%): 11561 cd
 (100%): 28902 cd

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

IsoLux Plot

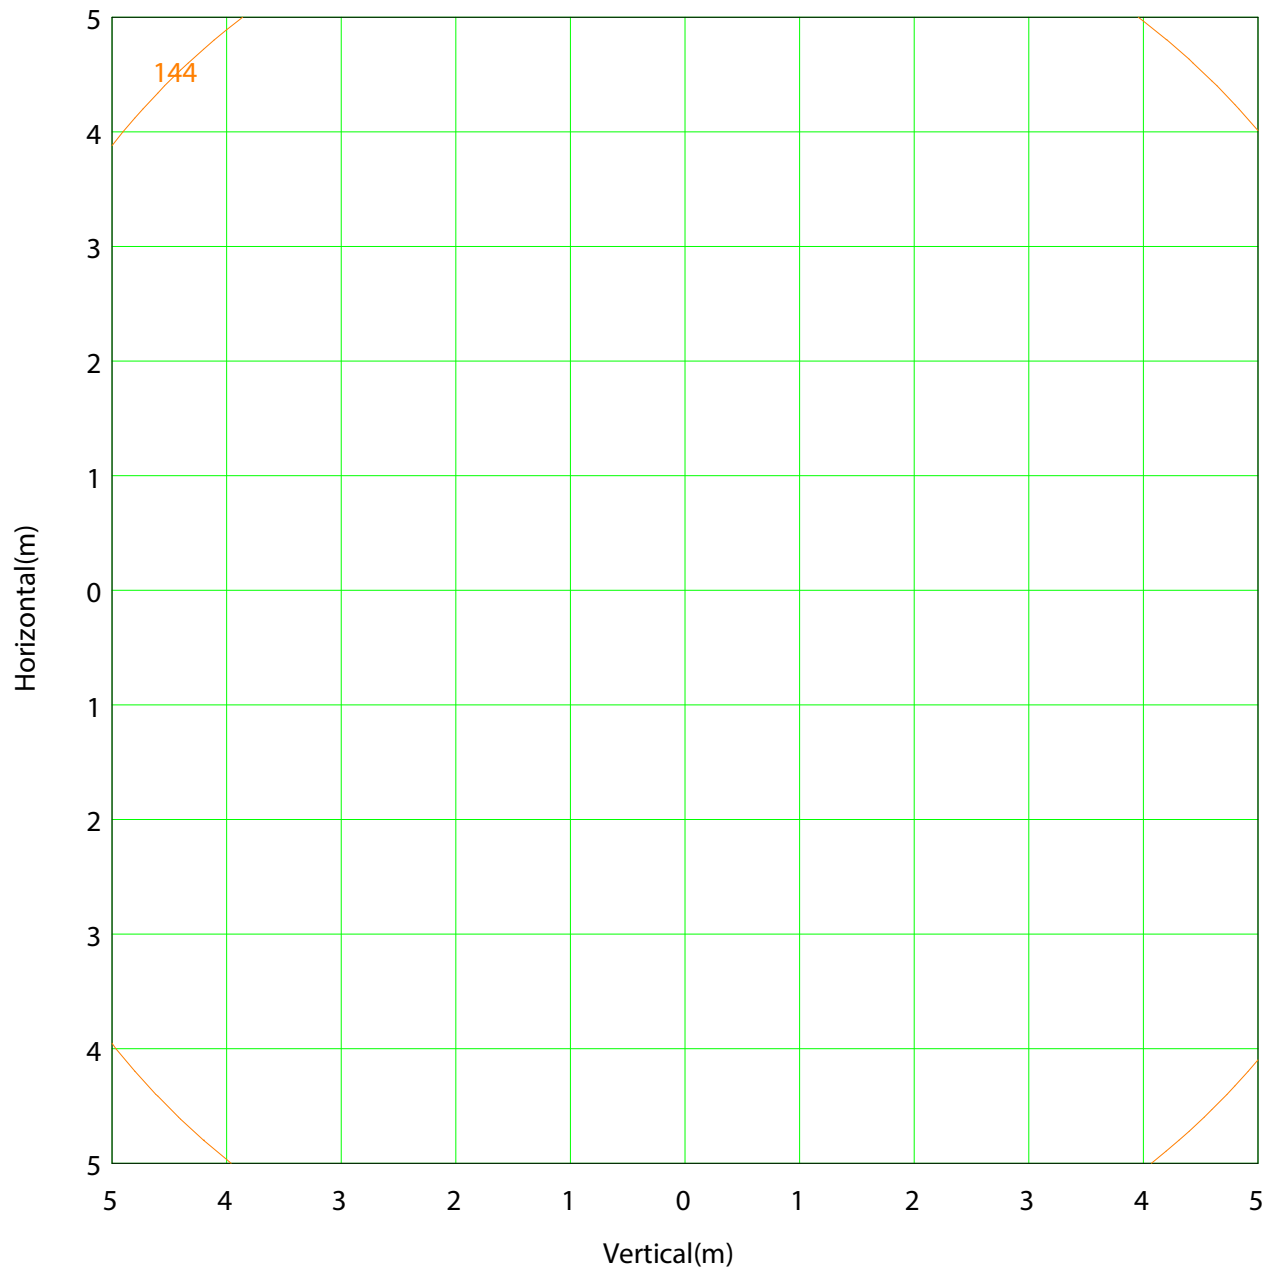

Mounting Height: 10.0m Max Lux(100%): 288.8 lx

— (1%): 2.9 lx	— (2%): 5.8 lx
— (5%): 14.4 lx	— (10%): 28.9 lx
— (20%): 57.8 lx	— (50%): 144.4 lx
— (100%): 288.8 lx	



C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<= 300		
2.20	D				2000	1000	500	<= 300	
2.55	E					2000	1000	500	<= 300

a b c d e f g h

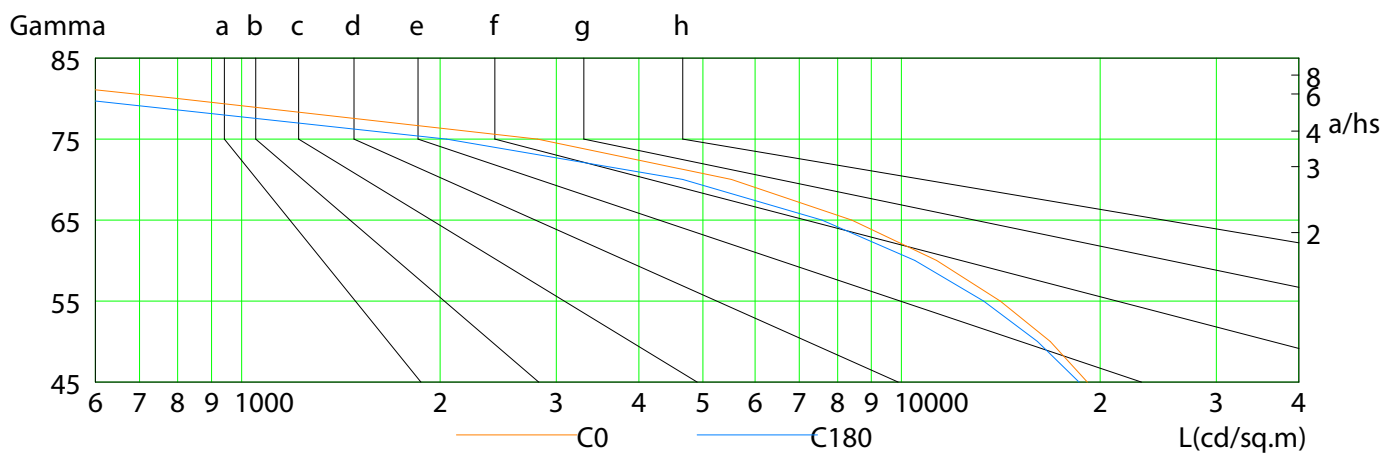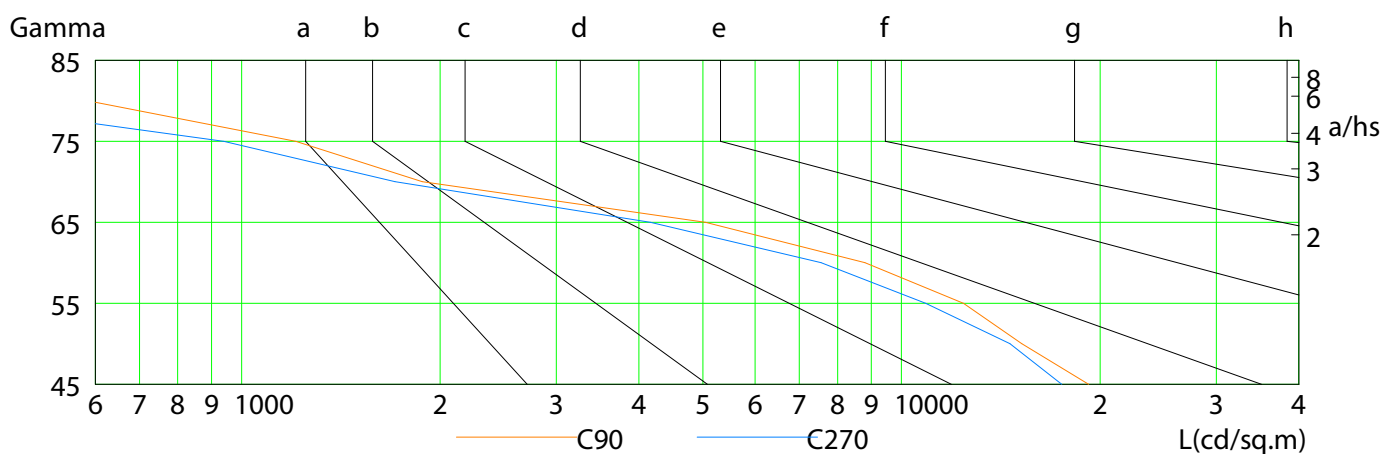


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85	
C0	19136	16810	14114	11300	8410	5525	2806	799	216	
C90	19205	15212	12413	8798	5048	1879	1208	586	168	
C180	18573	16074	13320	10475	7575	4664	2045	553	113	
C270	17494	14603	10886	7548	4164	1708	939	338	29	

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:


Illuminance at a Distance

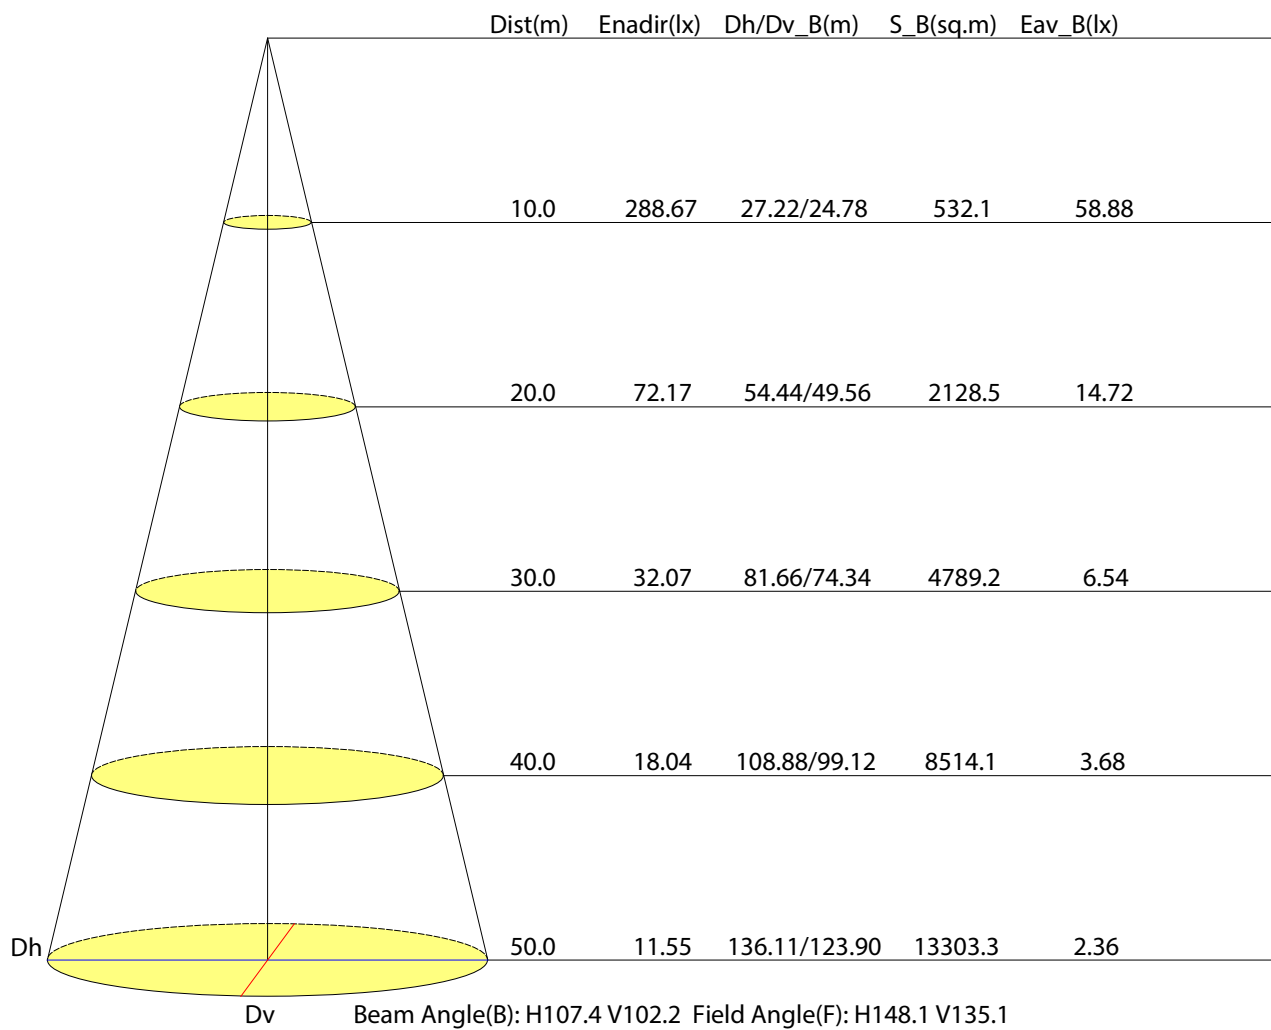

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K= 1.0000]
 Humidity: 65
 Inspector:

Vertical IsoLux Plot

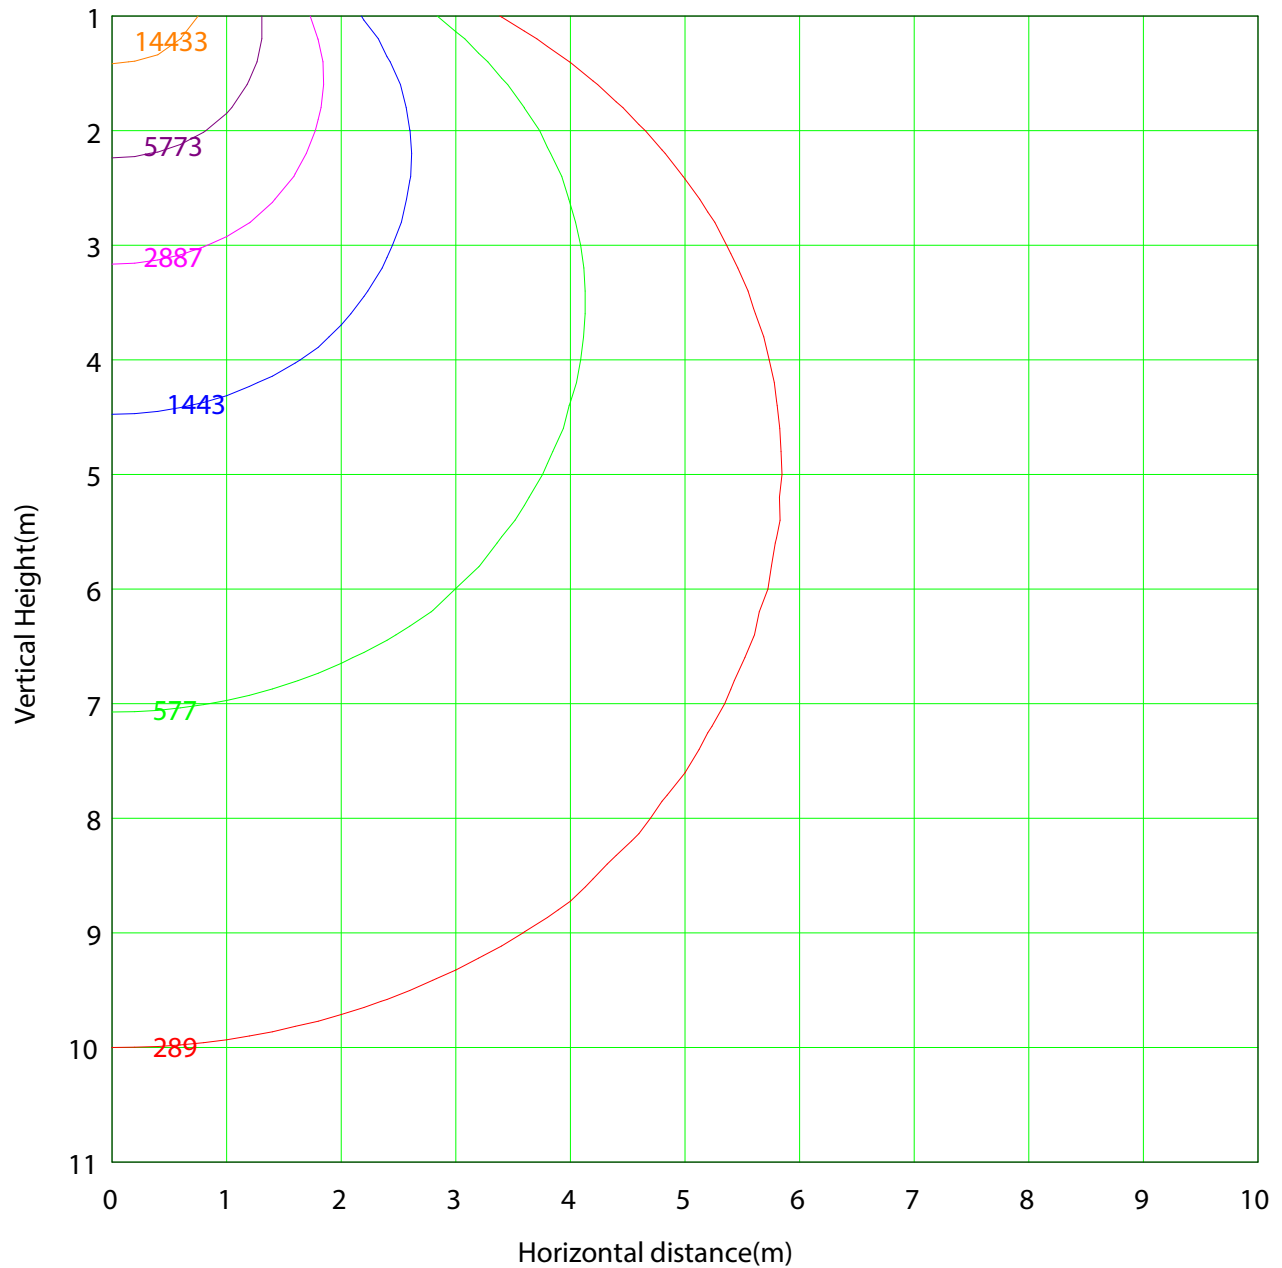

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 28866.9 lx

(1%): 288.7 lx

(2%): 577.3 lx

(5%): 1443.3 lx

(10%): 2886.7 lx

(20%): 5773.4 lx

(50%): 14433.4 lx

(100%): 28866.9 lx

C Plane (°): 0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Area Flux Table

Unit: lm


-90	0.1	0.2	0.5	0.8	1.3	1.9	2.4	2.8	2.8	3.0	3.3	3.2	2.7	2.1	1.4	0.8	0.3	0.1				29.6	0.0
-80	0.1	0.5	2.3	6.0	12.5	20.9	28.2	32.0	31.3	32.6	35.4	33.1	26.2	16.9	8.6	3.6	1.0	0.1				291.5	0.0
-70	0.1	1.6	7.7	24.6	50.7	78.3	105.9	125.7	131.1	132.7	130.5	113.2	87.3	60.1	32.2	11.1	2.5	0.2				1095.7	95.8
-60	0.2	3.3	20.0	59.1	116.7	188.6	256.5	307.5	330.9	332.6	312.4	264.3	198.5	127.4	69.1	26.8	5.0	0.4				2619.2	553.7
-50	0.3	6.0	37.8	104.0	200.4	307.7	407.6	484.7	526.5	528.2	489.5	415.3	317.7	211.8	114.9	46.2	8.9	0.6				4208.4	170.4
-40	0.4	9.8	57.0	150.2	275.1	409.8	536.6	637.8	669.1	369.2	964.2	854.4	542.0	0.286	716.1	9.66	2.13	0.7				5597.3	571.1
-30	0.5	13.7	75.0	188.3	333.5	488.6	631.9	730.6	781.1	783.0	736.4	640.4	499.3	345.6	200.5	84.9	18.5	0.9				6552.6	532.2
-20	0.6	16.9	88.8	215.6	373.5	539.7	683.5	786.3	836.7	837.8	791.1	693.7	551.5	386.4	228.4	99.4	22.3	1.0				7153.7	135.6
-10	0.7	18.9	97.1	230.9	394.3	562.4	709.5	813.6	864.7	865.9	817.9	721.5	557.5	640.8	524.5	108.3	24.6	1.1				7459.9	444.3
0	0.7	18.9	97.4	231.7	395.9	564.4	711.5	815.9	867.7	869.0	820.2	723.4	577.5	410.2	245.3	108.6	24.6	1.1				7484.0	468.4
10	0.6	17.0	89.7	217.9	378.4	546.1	689.2	793.7	846.2	847.3	798.5	699.5	557.9	391.3	230.7	100.3	22.3	1.0				7227.7	210.1
20	0.6	13.8	76.3	191.9	340.7	501.1	643.3	742.8	796.8	798.8	748.6	651.8	511.8	352.9	204.1	86.2	18.6	0.9				6681.6	660.6
30	0.4	10.0	58.3	154.7	283.5	424.9	559.3	662.5	719.2	720.9	667.5	567.2	435.1	295.2	166.3	67.6	14.0	0.7				5807.6	781.5
40	0.3	6.3	38.5	108.7	209.7	322.5	430.3	516.3	565.0	566.6	521.1	438.0	332.5	221.1	119.6	47.0	9.2	0.6				4453.4	16.5
50	0.2	3.5	20.8	61.5	125.5	202.8	277.1	334.8	364.5	366.2	339.7	284.9	212.8	136.2	71.5	27.6	5.2	0.4				2835.2	768.9
60	0.1	1.8	8.5	26.3	53.5	86.3	120.1	146.5	157.6	159.2	151.3	127.4	95.4	62.9	33.9	12.0	2.8	0.2				1245.9	997.7
70	0.1	0.7	2.9	7.5	15.2	24.8	33.3	38.1	38.4	39.6	41.5	38.2	30.1	19.5	10.1	4.2	1.2	0.1				345.6	0.0
80	0.1	0.3	0.6	1.2	2.2	3.4	4.6	5.6	6.2	6.4	6.1	5.3	4.2	2.9	1.7	0.9	0.3	0.1				52.0	0.0
90	6.3	143.3	779.0	1981.1	3562.7	5274.3	6831.0	7977.1	8557.9	8582.7	8053.7	6965.0	5436.1	3737.6	2144.8	901.5	195.2	10.3	71139				
Flux(E)	0.0	45.7	684.3	1889.9	3469.2	5173.4	6723.0	7863.8	8450.4	8472.6	7938.1	6856.4	5335.5	3644.9	2056.2	811.4	91.9	0.0				69507	

Horizontal plane

C Plane (°): 0.0-360.0: 90.0
Test Lab: Inventfine instrument
Test Type: TYPE C
Temperature: 26
Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1800B
Distance: 8.607 m [K=1.0000]
Humidity: 65
Inspector:

The Average Illuminance Effective Figure

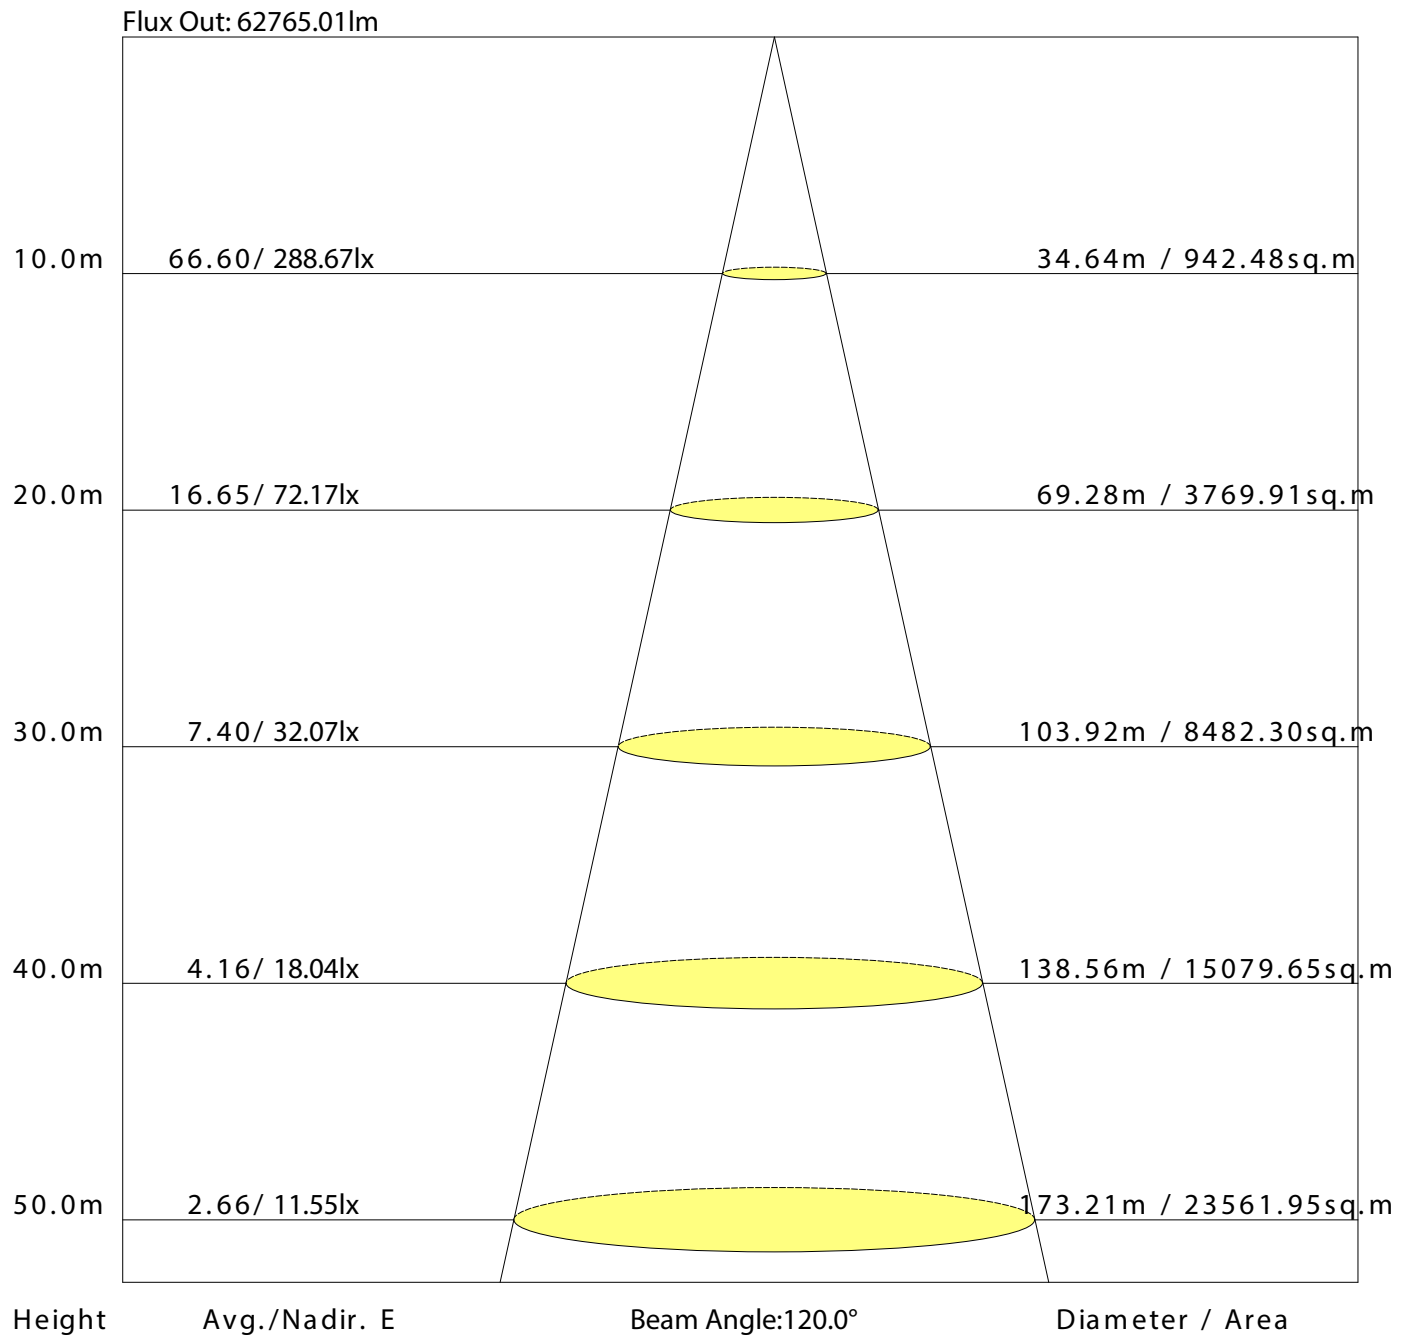

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S = 1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S = 1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S = 2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 71907lm ($8\log(F/F_0) = 14.9$).

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen

Gamma [°]	lmean [cd]	Zonal Flux [lm]	Sum	Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	28866.8	27.6		27.6	0.04	0.04
1.0-2.0	28872.7	82.9		110.5	0.12	0.15
2.0-3.0	28862.5	138.1		248.6	0.19	0.35
3.0-4.0	28826.3	193.0		441.5	0.27	0.61
4.0-5.0	28790.4	247.7		689.3	0.34	0.96
5.0-6.0	28748.3	302.2		991.4	0.42	1.38
6.0-7.0	28700.2	356.3		1347.7	0.50	1.87
7.0-8.0	28644.2	410.0		1757.7	0.57	2.44
8.0-9.0	28574.7	463.2		2220.9	0.64	3.09
9.0-10.0	28504.3	515.9		2736.8	0.72	3.81
10.0-11.0	28423.1	568.0		3304.8	0.79	4.60
11.0-12.0	28328.2	619.3		3924.1	0.86	5.46
12.0-13.0	28232.9	670.1		4594.2	0.93	6.39
13.0-14.0	28133.1	720.2		5314.4	1.00	7.39
14.0-15.0	28018.9	769.3		6083.7	1.07	8.46
15.0-16.0	27890.7	817.4		6901.1	1.14	9.60
16.0-17.0	27758.2	864.5		7765.6	1.20	10.80
17.0-18.0	27621.0	910.8		8676.5	1.27	12.07
18.0-19.0	27476.8	956.1		9632.5	1.33	13.40
19.0-20.0	27324.4	1000.2		10632.8	1.39	14.79
20.0-21.0	27162.8	1043.2		11675.9	1.45	16.24
21.0-22.0	26990.4	1084.8		12760.7	1.51	17.75
22.0-23.0	26797.8	1124.6		13885.3	1.56	19.31
23.0-24.0	26570.0	1161.8		15047.1	1.62	20.93
24.0-25.0	26319.0	1196.9		16244.0	1.66	22.59
25.0-26.0	26072.2	1230.9		17474.8	1.71	24.30
26.0-27.0	25825.6	1263.7		18738.5	1.76	26.06
27.0-28.0	25563.0	1294.4		20032.9	1.80	27.86
28.0-29.0	25305.6	1324.1		21357.0	1.84	29.70
29.0-30.0	25042.7	1352.3		22709.3	1.88	31.58
30.0-31.0	24754.3	1377.8		24087.1	1.92	33.50
31.0-32.0	24455.7	1401.3		25488.3	1.95	35.45
32.0-33.0	24134.3	1422.0		26910.4	1.98	37.42
33.0-34.0	23807.3	1441.0		28351.3	2.00	39.43
34.0-35.0	23476.4	1458.2		29809.5	2.03	41.46
35.0-36.0	23155.8	1474.6		31284.1	2.05	43.51

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	lmean [cd]	Zonal Flux [lm]	Sum	Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	22832.6	1489.3	32773.4	2.07	45.58	
37.0-38.0	22385.6	1494.4	34267.8	2.08	47.66	
38.0-39.0	21856.0	1492.0	35759.8	2.07	49.73	
39.0-40.0	21411.7	1493.5	37253.3	2.08	51.81	
40.0-41.0	20925.4	1490.3	38743.6	2.07	53.88	
41.0-42.0	20383.3	1481.1	40224.8	2.06	55.94	
42.0-43.0	19833.3	1469.4	41694.1	2.04	57.98	
43.0-44.0	19298.6	1456.8	43150.9	2.03	60.01	
44.0-45.0	18836.0	1447.8	44598.7	2.01	62.02	
45.0-46.0	18263.6	1428.5	46027.2	1.99	64.01	
46.0-47.0	17652.6	1404.2	47431.4	1.95	65.96	
47.0-48.0	17088.2	1381.6	48812.9	1.92	67.88	
48.0-49.0	16568.3	1360.8	50173.7	1.89	69.78	
49.0-50.0	16007.5	1334.8	51508.5	1.86	71.63	
50.0-51.0	15327.5	1297.0	52805.5	1.80	73.44	
51.0-52.0	14774.4	1268.0	54073.5	1.76	75.20	
52.0-53.0	14195.6	1235.0	55308.5	1.72	76.92	
53.0-54.0	13508.8	1190.8	56499.3	1.66	78.57	
54.0-55.0	12939.2	1155.2	57654.5	1.61	80.18	
55.0-56.0	12360.2	1117.1	58771.5	1.55	81.73	
56.0-57.0	11674.5	1067.6	59839.1	1.48	83.22	
57.0-58.0	11067.6	1023.6	60862.7	1.42	84.64	
58.0-59.0	10444.3	976.6	61839.2	1.36	86.00	
59.0-60.0	9797.8	925.8	62765.0	1.29	87.29	
60.0-61.0	9132.2	871.6	63636.6	1.21	88.50	
61.0-62.0	8507.9	819.9	64456.5	1.14	89.64	
62.0-63.0	7873.0	765.8	65222.4	1.06	90.70	
63.0-64.0	7244.9	711.0	65933.4	0.99	91.69	
64.0-65.0	6662.4	659.4	66592.8	0.92	92.61	
65.0-66.0	5950.5	593.8	67186.6	0.83	93.44	
66.0-67.0	5317.1	534.7	67721.3	0.74	94.18	
67.0-68.0	4730.4	479.3	68200.6	0.67	94.85	
68.0-69.0	4171.7	425.6	68626.2	0.59	95.44	
69.0-70.0	3679.3	377.9	69004.1	0.53	95.96	
70.0-71.0	3277.5	338.8	69342.9	0.47	96.43	
71.0-72.0	2918.8	303.5	69646.5	0.42	96.86	

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	lmean [cd]	Zonal Flux [lm]	Sum [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	2565.1	268.3	69914.8	0.37	97.23
73.0-74.0	2244.5	236.0	70150.7	0.33	97.56
74.0-75.0	1917.4	202.6	70353.4	0.28	97.84
75.0-76.0	1608.5	170.8	70524.1	0.24	98.08
76.0-77.0	1329.4	141.8	70665.9	0.20	98.27
77.0-78.0	1067.6	114.3	70780.2	0.16	98.43
78.0-79.0	838.2	90.1	70870.3	0.13	98.56
79.0-80.0	650.8	70.2	70940.4	0.10	98.66
80.0-81.0	510.4	55.2	70995.6	0.08	98.73
81.0-82.0	402.7	43.7	71039.3	0.06	98.79
82.0-83.0	308.9	33.6	71072.9	0.05	98.84
83.0-84.0	227.6	24.8	71097.7	0.03	98.87
84.0-85.0	161.1	17.6	71115.3	0.02	98.90
85.0-86.0	109.3	12.0	71127.2	0.02	98.92
86.0-87.0	70.2	7.7	71134.9	0.01	98.93
87.0-88.0	43.7	4.8	71139.7	0.01	98.93
88.0-89.0	31.4	3.4	71143.1	0.00	98.94
89.0-90.0	28.8	3.2	71146.3	0.00	98.94
90.0-91.0	29.8	3.3	71149.6	0.00	98.95
91.0-92.0	31.8	3.5	71153.0	0.00	98.95
92.0-93.0	33.9	3.7	71156.8	0.01	98.96
93.0-94.0	36.2	4.0	71160.7	0.01	98.96
94.0-95.0	38.5	4.2	71164.9	0.01	98.97
95.0-96.0	40.8	4.5	71169.4	0.01	98.97
96.0-97.0	43.2	4.7	71174.1	0.01	98.98
97.0-98.0	46.0	5.0	71179.1	0.01	98.99
98.0-99.0	48.8	5.3	71184.4	0.01	99.00
99.0-100.0	51.4	5.6	71190.0	0.01	99.00
100.0-101.0	54.0	5.8	71195.8	0.01	99.01
101.0-102.0	56.8	6.1	71201.9	0.01	99.02
102.0-103.0	59.8	6.4	71208.3	0.01	99.03
103.0-104.0	62.7	6.7	71215.0	0.01	99.04
104.0-105.0	65.7	7.0	71222.0	0.01	99.05
105.0-106.0	69.1	7.3	71229.3	0.01	99.06
106.0-107.0	72.3	7.6	71236.9	0.01	99.07
107.0-108.0	75.6	7.9	71244.8	0.01	99.08

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	lmean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	78.7	8.2	71252.9	0.01	99.09
109.0-110.0	81.4	8.4	71261.4	0.01	99.10
110.0-111.0	84.4	8.7	71270.0	0.01	99.11
111.0-112.0	87.5	8.9	71279.0	0.01	99.13
112.0-113.0	90.7	9.2	71288.1	0.01	99.14
113.0-114.0	93.9	9.4	71297.6	0.01	99.15
114.0-115.0	97.0	9.7	71307.3	0.01	99.17
115.0-116.0	100.2	9.9	71317.2	0.01	99.18
116.0-117.0	103.5	10.2	71327.3	0.01	99.19
117.0-118.0	106.8	10.4	71337.7	0.01	99.21
118.0-119.0	109.8	10.6	71348.3	0.01	99.22
119.0-120.0	112.8	10.8	71359.1	0.01	99.24
120.0-121.0	116.1	11.0	71370.1	0.02	99.25
121.0-122.0	119.4	11.2	71381.2	0.02	99.27
122.0-123.0	122.3	11.3	71392.5	0.02	99.28
123.0-124.0	125.3	11.5	71404.0	0.02	99.30
124.0-125.0	128.3	11.6	71415.6	0.02	99.32
125.0-126.0	131.4	11.7	71427.3	0.02	99.33
126.0-127.0	134.4	11.8	71439.2	0.02	99.35
127.0-128.0	137.3	11.9	71451.1	0.02	99.37
128.0-129.0	140.1	12.0	71463.1	0.02	99.38
129.0-130.0	142.8	12.1	71475.2	0.02	99.40
130.0-131.0	145.7	12.2	71487.4	0.02	99.42
131.0-132.0	148.7	12.2	71499.6	0.02	99.43
132.0-133.0	151.7	12.3	71511.8	0.02	99.45
133.0-134.0	154.6	12.3	71524.1	0.02	99.47
134.0-135.0	157.4	12.3	71536.4	0.02	99.48
135.0-136.0	160.1	12.3	71548.7	0.02	99.50
136.0-137.0	163.2	12.3	71561.1	0.02	99.52
137.0-138.0	166.2	12.3	71573.4	0.02	99.54
138.0-139.0	168.9	12.3	71585.6	0.02	99.55
139.0-140.0	171.9	12.2	71597.9	0.02	99.57
140.0-141.0	175.1	12.2	71610.1	0.02	99.59
141.0-142.0	178.1	12.2	71622.3	0.02	99.60
142.0-143.0	181.0	12.1	71634.3	0.02	99.62
143.0-144.0	183.9	12.0	71646.3	0.02	99.64

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	lmean [cd]	Zonal Flux [lm]	Sum	Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	186.8	11.9	71658.2		0.02	99.65
145.0-146.0	189.7	11.8	71670.0		0.02	99.67
146.0-147.0	192.8	11.7	71681.7		0.02	99.69
147.0-148.0	195.5	11.5	71693.2		0.02	99.70
148.0-149.0	198.3	11.4	71704.6		0.02	99.72
149.0-150.0	201.3	11.2	71715.8		0.02	99.73
150.0-151.0	204.2	11.0	71726.8		0.02	99.75
151.0-152.0	207.2	10.8	71737.6		0.02	99.76
152.0-153.0	210.0	10.6	71748.3		0.01	99.78
153.0-154.0	212.6	10.4	71758.7		0.01	99.79
154.0-155.0	215.2	10.2	71768.8		0.01	99.81
155.0-156.0	218.0	9.9	71778.7		0.01	99.82
156.0-157.0	220.7	9.7	71788.4		0.01	99.84
157.0-158.0	223.5	9.4	71797.8		0.01	99.85
158.0-159.0	226.0	9.1	71806.9		0.01	99.86
159.0-160.0	228.3	8.8	71815.6		0.01	99.87
160.0-161.0	230.4	8.4	71824.0		0.01	99.88
161.0-162.0	232.7	8.1	71832.1		0.01	99.90
162.0-163.0	234.9	7.7	71839.9		0.01	99.91
163.0-164.0	236.9	7.4	71847.3		0.01	99.92
164.0-165.0	238.7	7.0	71854.3		0.01	99.93
165.0-166.0	240.4	6.6	71860.9		0.01	99.94
166.0-167.0	242.1	6.2	71867.1		0.01	99.94
167.0-168.0	243.6	5.8	71872.8		0.01	99.95
168.0-169.0	245.2	5.4	71878.2		0.01	99.96
169.0-170.0	246.6	4.9	71883.1		0.01	99.97
170.0-171.0	247.7	4.5	71887.6		0.01	99.97
171.0-172.0	248.9	4.0	71891.6		0.01	99.98
172.0-173.0	250.0	3.6	71895.2		0.00	99.98
173.0-174.0	250.8	3.1	71898.3		0.00	99.99
174.0-175.0	251.5	2.6	71901.0		0.00	99.99
175.0-176.0	252.0	2.2	71903.2		0.00	99.99
176.0-177.0	252.5	1.7	71904.8		0.00	100.00
177.0-178.0	253.0	1.2	71906.1		0.00	100.00
178.0-179.0	253.3	0.7	71906.8		0.00	100.00
179.0-180.0	253.6	0.2	71907.0		0.00	100.00

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

Zonal Lumen (Continue 5)

cone flux(90°): 44598.67 lm

%lum = 62.0%

%lamp = 62.0%

cone flux(120°): 62765.01 lm

%lum = 87.3%

%lamp = 87.3%

C Plane (°): 0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0						
G0.0	28866.9	28866.9	28866.9	28866.9	28866.9						
G1.0	28859.8	28889.3	28851.1	28866.9	28859.8						
G2.0	28887.4	28901.8	28872.1	28853.3	28887.4						
G3.0	28855.2	28889.9	28836.4	28804.2	28855.2						
G4.0	28832.9	28878.7	28777.8	28735.1	28832.9						
G5.0	28797.2	28829.0	28747.4	28725.0	28797.2						
G6.0	28762.6	28777.6	28701.7	28645.8	28762.6						
G7.0	28698.7	28762.3	28648.3	28605.0	28698.7						
G8.0	28658.3	28744.5	28547.6	28489.1	28658.3						
G9.0	28561.1	28667.1	28494.3	28435.9	28561.1						
G10.0	28538.8	28602.6	28403.5	28331.3	28538.8						
G11.0	28444.5	28508.7	28315.6	28240.3	28444.5						
G12.0	28340.2	28460.2	28192.5	28123.8	28340.2						
G13.0	28266.4	28317.7	28128.7	28034.0	28266.4						
G14.0	28175.0	28246.2	27998.6	27898.6	28175.0						
G15.0	28056.6	28124.4	27873.2	27778.6	28056.6						
G16.0	27909.0	28044.0	27719.8	27620.2	27909.0						
G17.0	27789.5	27893.3	27617.2	27473.0	27789.5						
G18.0	27670.5	27749.0	27469.0	27306.3	27670.5						
G19.0	27524.7	27606.6	27333.1	27154.9	27524.7						
G20.0	27372.9	27477.1	27142.1	26983.5	27372.9						
G21.0	27239.3	27280.3	27015.5	26792.0	27239.3						
G22.0	27049.5	27130.7	26832.7	26583.3	27049.5						
G23.0	26906.6	26952.2	26529.9	26397.1	26906.6						
G24.0	26707.4	26731.7	26175.4	26159.5	26707.4						
G25.0	26521.1	26552.0	25768.8	25936.0	26521.1						
G26.0	26160.8	26352.8	25566.1	25720.3	26160.8						
G27.0	25804.5	26113.4	25370.4	25516.9	25804.5						
G28.0	25548.5	25849.7	25034.7	25265.7	25548.5						
G29.0	25357.5	25660.6	24742.4	24985.5	25357.5						
G30.0	25056.4	25411.1	24405.5	24722.4	25056.4						
G31.0	24588.3	25165.2	24195.8	24489.5	24588.3						
G32.0	24280.1	24858.4	23900.5	24168.0	24280.1						
G33.0	24001.2	24634.9	23307.6	23923.8	24001.2						
G34.0	23731.2	24303.9	22927.9	23627.6	23731.2						
G35.0	23205.6	24017.8	22664.3	23332.7	23205.6						
G36.0	22876.4	23720.5	22403.6	23025.3	22876.4						

C Plane (°):0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0						
G37.0	22577.0	23407.7	21887.4	22762.8	22577.0						
G38.0	22147.0	23144.1	21593.3	21565.8	22147.0						
G39.0	21653.1	22841.4	21196.1	20707.4	21653.1						
G40.0	21364.8	22460.2	20662.4	20407.7	21364.8						
G41.0	21029.1	21121.8	20257.0	20100.3	21029.1						
G42.0	20434.5	20473.4	19893.7	19756.3	20434.5						
G43.0	20055.4	20150.0	19374.1	18529.1	20055.4						
G44.0	19736.7	19810.7	18924.7	17807.9	19736.7						
G45.0	19136.2	19204.8	18573.2	17494.0	19136.2						
G46.0	18709.1	17858.2	17992.6	17141.1	18709.1						
G47.0	18348.2	17467.4	17538.5	16165.8	18348.2						
G48.0	17689.1	17137.0	17068.1	15291.5	17689.1						
G49.0	17313.0	16578.4	16522.6	14946.8	17313.0						
G50.0	16810.3	15211.7	16074.5	14602.8	16810.3						
G51.0	16233.8	14880.0	15455.8	13351.4	16233.8						
G52.0	15804.4	14540.1	15046.8	12883.2	15804.4						
G53.0	15217.9	13178.8	14379.5	12513.7	15217.9						
G54.0	14753.9	12718.9	13951.3	11356.3	14753.9						
G55.0	14114.1	12412.6	13320.3	10886.3	14114.1						
G56.0	13693.5	11079.0	12863.9	10512.1	13693.5						
G57.0	13021.5	10705.5	12214.8	9305.6	13021.5						
G58.0	12511.8	10166.3	11626.5	8988.8	12511.8						
G59.0	11968.7	9105.8	11138.5	8047.7	11968.7						
G60.0	11300.2	8797.9	10475.3	7548.2	11300.2						
G61.0	10783.5	7626.8	9854.9	6671.0	10783.5						
G62.0	10258.0	7340.1	9294.8	6234.1	10258.0						
G63.0	9600.6	6290.9	8683.2	5282.4	9600.6						
G64.0	8998.3	5934.4	8134.8	5034.7	8998.3						
G65.0	8410.1	5047.7	7575.3	4163.9	8410.1						
G66.0	7844.2	4251.4	6917.3	3394.3	7844.2						
G67.0	7224.9	3895.0	6347.9	2661.9	7224.9						
G68.0	6675.4	3186.8	5824.7	2027.0	6675.4						
G69.0	6100.6	2487.5	5188.4	1883.4	6100.6						
G70.0	5524.7	1878.6	4663.5	1707.8	5524.7						
G71.0	4989.2	1771.6	4115.1	1569.5	4989.2						
G72.0	4379.9	1592.5	3519.9	1412.8	4379.9						
G73.0	3850.9	1486.7	3018.4	1259.7	3850.9						

C Plane (°):0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0						
G74.0	3348.8	1364.9	2540.3	1085.9	3348.8						
G75.0	2806.3	1208.3	2045.3	939.3	2806.3						
G76.0	2346.4	1083.0	1636.3	803.4	2346.4						
G77.0	1892.4	945.8	1261.4	666.8	1892.4						
G78.0	1500.4	812.8	921.6	539.7	1500.4						
G79.0	1138.9	698.7	660.3	433.3	1138.9						
G80.0	798.5	585.8	553.1	337.5	798.5						
G81.0	638.6	480.6	440.6	248.3	638.6						
G82.0	519.7	389.6	339.2	164.9	519.7						
G83.0	407.8	305.6	241.4	102.9	407.8						
G84.0	308.2	229.4	170.5	55.0	308.2						
G85.0	215.6	168.5	113.1	29.0	215.6						
G86.0	147.0	107.0	70.9	23.6	147.0						
G87.0	94.3	55.6	41.0	22.5	94.3						
G88.0	56.8	26.0	30.5	23.1	56.8						
G89.0	34.6	22.5	32.2	25.4	34.6						
G90.0	31.6	23.1	34.6	26.6	31.6						
G91.0	32.8	24.8	36.9	28.4	32.8						
G92.0	35.1	27.2	38.7	30.1	35.1						
G93.0	38.1	28.4	41.0	32.5	38.1						
G94.0	40.4	31.3	43.4	34.9	40.4						
G95.0	42.8	33.1	45.7	36.7	42.8						
G96.0	45.1	35.5	48.0	39.6	45.1						
G97.0	47.5	37.8	51.0	41.4	47.5						
G98.0	51.0	42.0	53.3	44.3	51.0						
G99.0	53.9	43.2	56.2	46.7	53.9						
G100.0	56.2	46.1	59.2	49.7	56.2						
G101.0	58.6	48.5	61.5	52.6	58.6						
G102.0	62.1	51.4	64.4	55.0	62.1						
G103.0	65.0	54.4	68.0	57.9	65.0						
G104.0	67.4	57.3	70.3	60.9	67.4						
G105.0	70.3	62.7	73.2	63.8	70.3						
G106.0	73.2	66.2	76.2	67.4	73.2						
G107.0	76.7	69.2	79.1	70.3	76.7						
G108.0	80.3	73.9	82.0	73.3	80.3						
G109.0	83.2	74.5	85.5	76.8	83.2						
G110.0	86.1	77.4	87.3	80.4	86.1						

C Plane (°):0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0						
G111.0	89.1	80.4	91.4	83.3	89.1						
G112.0	92.0	83.9	93.7	86.3	92.0						
G113.0	94.9	87.5	96.7	90.4	94.9						
G114.0	98.4	90.4	99.6	93.4	98.4						
G115.0	101.4	94.0	101.9	96.9	101.4						
G116.0	104.3	97.5	105.5	99.9	104.3						
G117.0	107.2	101.1	109.0	103.4	107.2						
G118.0	110.7	104.6	111.3	107.0	110.7						
G119.0	113.7	107.6	113.7	110.0	113.7						
G120.0	117.2	110.5	117.2	112.9	117.2						
G121.0	120.1	114.1	120.7	116.5	120.1						
G122.0	123.0	117.6	123.0	120.0	123.0						
G123.0	126.0	120.6	125.4	123.0	126.0						
G124.0	128.3	124.1	128.3	126.5	128.3						
G125.0	131.2	127.1	131.8	128.9	131.2						
G126.0	134.7	130.1	134.7	132.4	134.7						
G127.0	137.7	133.6	137.1	134.8	137.7						
G128.0	140.6	136.5	140.0	137.7	140.6						
G129.0	143.0	139.5	143.0	140.1	143.0						
G130.0	146.5	141.9	145.9	143.1	146.5						
G131.0	148.8	144.8	148.8	146.0	148.8						
G132.0	152.3	147.8	151.7	149.0	152.3						
G133.0	155.3	150.7	154.7	151.9	155.3						
G134.0	158.2	153.1	158.2	154.9	158.2						
G135.0	160.5	156.1	160.5	157.8	160.5						
G136.0	163.5	159.0	162.9	160.8	163.5						
G137.0	167.0	162.0	166.4	163.7	167.0						
G138.0	169.9	164.3	169.3	166.7	169.9						
G139.0	172.8	167.3	171.7	169.1	172.8						
G140.0	176.3	170.2	174.6	173.2	176.3						
G141.0	178.7	172.6	178.1	176.7	178.7						
G142.0	181.6	176.2	181.0	179.7	181.6						
G143.0	184.5	178.5	184.0	182.7	184.5						
G144.0	186.9	182.1	186.9	185.6	186.9						
G145.0	189.2	184.4	189.8	189.2	189.2						
G146.0	192.2	187.4	193.3	192.1	192.2						
G147.0	195.1	190.3	196.3	195.7	195.1						

C Plane (°):0.0-360.0: 90.0

Test Lab: Inventfine instrument

Test Type: TYPE C

Temperature: 26

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.607 m [K=1.0000]

Humidity: 65

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0						
G148.0	197.4	192.7	198.0	198.6	197.4						
G149.0	201.0	195.1	201.5	202.2	201.0						
G150.0	202.7	198.0	204.5	205.7	202.7						
G151.0	205.6	200.4	208.0	208.7	205.6						
G152.0	208.6	203.4	211.5	211.6	208.6						
G153.0	210.9	205.7	214.4	214.0	210.9						
G154.0	213.3	208.7	217.4	216.4	213.3						
G155.0	216.2	211.0	220.3	218.7	216.2						
G156.0	217.9	212.8	224.4	222.3	217.9						
G157.0	220.3	215.8	227.3	225.2	220.3						
G158.0	223.2	218.1	230.2	227.6	223.2						
G159.0	225.6	220.5	232.6	230.5	225.6						
G160.0	227.3	222.9	234.9	232.3	227.3						
G161.0	230.2	224.6	236.7	234.1	230.2						
G162.0	233.2	227.0	239.0	236.5	233.2						
G163.0	234.9	229.4	241.4	238.2	234.9						
G164.0	237.3	231.7	243.1	239.4	237.3						
G165.0	239.0	233.5	244.9	240.6	239.0						
G166.0	240.8	235.3	246.6	242.4	240.8						
G167.0	242.6	237.6	247.8	243.6	242.6						
G168.0	244.3	239.4	249.0	244.7	244.3						
G169.0	246.1	241.2	250.7	245.9	246.1						
G170.0	247.8	243.0	251.3	246.5	247.8						
G171.0	249.0	244.7	252.5	247.1	249.0						
G172.0	250.2	245.9	253.7	248.3	250.2						
G173.0	251.3	247.1	254.3	248.9	251.3						
G174.0	252.5	248.3	254.9	249.5	252.5						
G175.0	253.1	248.9	255.4	249.5	253.1						
G176.0	254.3	249.5	255.4	250.0	254.3						
G177.0	254.9	250.0	255.4	250.6	254.9						
G178.0	255.4	250.0	256.0	251.8	255.4						
G179.0	255.4	250.0	256.0	251.8	255.4						
G180.0	256.6	250.6	256.0	251.8	256.6						

C Plane (°): 0.0-360.0: 90.0
 Test Lab: Inventfine instrument
 Test Type: TYPE C
 Temperature: 26
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1800B
 Distance: 8.607 m [K=1.0000]
 Humidity: 65
 Inspector:

LED Average Luminance Report

Avg.L	cd/m ²
L 0-180(65) av	1.#J
L 0-180(75) av	1.#J
L 0-180(85) av	1.#J
L 90-270(65) av	1.#J
L 90-270(75) av	1.#J
L 90-270(85) av	1.#J
L 45(65) av	1.#J
L 45(75) av	1.#J
L 45(85) av	1.#J

Standard: GB/T 29293-2012